



AI

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)


(51) International Patent Classification <sup>6</sup> : <b>H04M 11/04</b>	<b>A1</b>	(11) International Publication Number: <b>WO 99/59321</b> (43) International Publication Date: 18 November 1999 (18.11.99)
--	-----------	---

(21) International Application Number: PCT/US99/08662

(22) International Filing Date: 17 April 1999 (17.04.99)

(30) Priority Data:  
09/075,740 11 May 1998 (11.05.98) US(71) Applicant: DETECTION SYSTEMS, INC. [US/US]; 130  
Perinton Parkway, Fairport, NY 14450-8412 (US).(72) Inventor: FORMOSA, Meinrad, J.; 25 Huntingwood Drive,  
Huntingwood, NSW 2148 (AU).(74) Agent: MATHEWS, J., Addison; 120 Oostagala Drive,  
Loudon, TN 37774 (US).(81) Designated States: AU, European patent (AT, BE, CH, CY,  
DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT,  
SE).**Published**  
*With international search report.*

(54) Title: SECURITY SYSTEM WITH CALL FORWARDING ACTIVATION

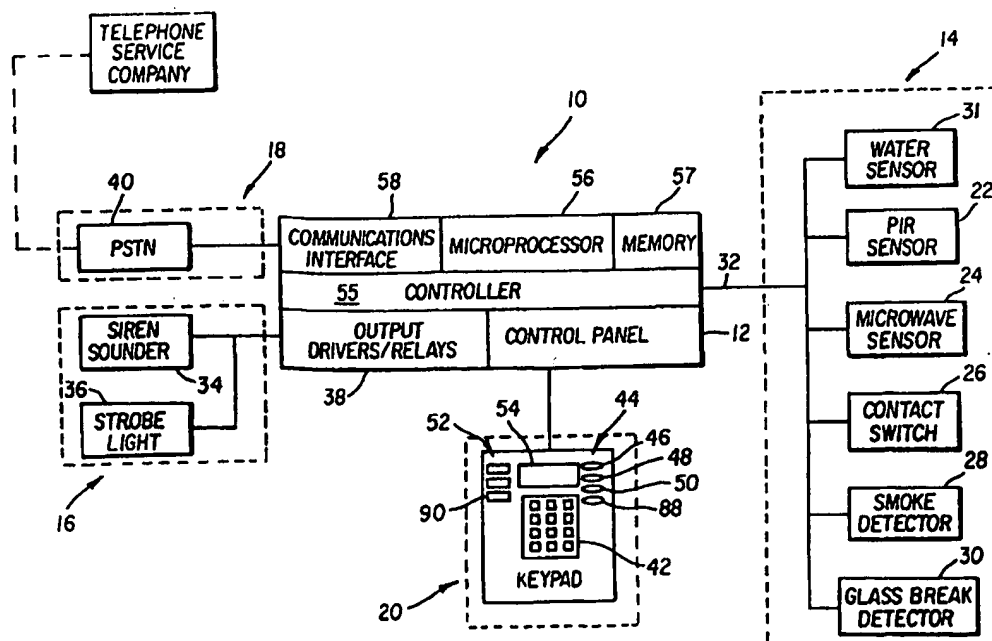

## (57) Abstract

A security system (10) is configured to enable and disable telephone functions in response to changes in the operational state of the system (10), such as fully armed, partially armed and disarmed. When the system (10) changes its operational state, it automatically sends a command to change the implementation of a telephone function, such as call forwarding. The system (10) includes an input device (20) for setting the system (10) to a selected state, an interface for communicating with the telephone service provider (40) and a controller for initiating communications through the interface and sending a command to change the telephone function.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

**SECURITY SYSTEM WITH CALL FORWARDING ACTIVATION****DESCRIPTION**

5

**Field of Invention**

The invention relates to security systems that report the occurrence of detected events, such as fire, water, intrusion, a threat to personal security and/or the like. More specifically, the invention relates to such systems including the capability for communicating automatically with remote locations over a publicly switched telephone network (PSTN), or other suitable communication channel. In a preferred embodiment, the invention provides for communicating automatically with a telephone service provider to change telephone service functions, such as call forwarding, in response to changes in the state of the security system, such as arming and disarming.

20

**Background of the Invention**

Modern telephone systems offer many valuable features. Call forwarding, for example, provides for the diversion of an incoming call from one telephone number to another, as directed by the intended recipient. Telephone calls to a residence can be transferred to ring at a business or mobile phone during working hours. Business calls can be transferred to ring at a residence or answering service when the business is closed.

30

Such telephone communications (telecom) features are usually implemented or turned on by codes recognized by

-2-

the service provider. The line is monitored by automated equipment that waits for a proper code identifying the desired function and how it is to be changed. A similar process is used to disable or turn off the function when its  
5 operation is no longer desired.

Call forwarding from a residence might be implemented by manually entering the code when a homeowner leaves for work. It might then be disabled by another manual operation when he or she returns home.

10 Although call forwarding is a valuable feature of many telecommunications systems, users often forget to disable the feature when they return to the location of the original number. Important calls may then be diverted to an unoccupied location. Similarly, because of this known risk  
15 of forgetfulness, the feature may be left unused even when its benefits are desired.

### Summary of the Invention

20 The present invention is directed to overcoming one or more of the problems set forth above. Briefly summarized, according to one aspect of the invention, an event detection system is configured to enable and disable telephone functions in response to changes in the  
25 operational state of the system.

According to more specific features, the event detection system is a security system having multiple states of operation, such as armed and disarmed. When the system changes its operational state, it automatically sends a  
30 command to change the implementation of a telephone function, such as call forwarding. Still more specifically, call forwarding is enabled when the system state is changed

-3-

to a higher level of security, such as armed, and disabled when the system state is changed to a lower level of security, such as disarmed.

5 The system includes an input device for setting the system to a selected state, an interface for communicating with the telephone service provider and a controller for initiating communications through the interface and sending a command to change the telephone function.

10 These and other features and advantages of the invention will be more clearly understood and appreciated from a review of the following detailed description of the preferred embodiments and appended claims, and by reference to the accompanying drawings.

15

#### **Brief Description of the Drawings**

Figure 1 is a block diagram representing an event detection system, such as a security system, incorporating a preferred embodiment of the invention.

20

Figure 2 is a flow chart depicting a data input operation in accordance with the preferred embodiment.

Figure 3 is a flow chart depicting the operation of the preferred embodiment for enabling and disabling a call forwarding telephone function.

25

#### **Detailed Description of a Preferred Embodiment of the Invention**

30 Referring now to the drawings, and beginning with Figure 1, a preferred embodiment of the invention is depicted including an event detecting system 10, comprising

-4-

a control panel 12, a plurality of event detectors 14, output devices 16, a communications channel 18 and a system input and output device 20.

The preferred system 10 is a security system and the event detectors 14 are detectors of security related events. Examples include fire, intrusion, water entry and threats to personal security. Such events are detected, for example, with passive infrared (PIR) sensors 22, active microwave ( $\mu$ w) sensors 24, contact switches 26, smoke sensors 28, glass break sensors 30, water sensors 31, and the like.

The passive infrared and microwave sensors 22 and 24, detect the motion of an intruder inside a protected structure, using body heat and the Doppler effect, respectively. The contact switches 26 typically are used on doors and windows. When the door or window is opened, one of the switches either makes or breaks contact, completing or opening an electrical circuit. The smoke sensors 28 look for the by-products of combustion, such as smoke, the glass break sensors 30 listen for the sounds or other vibrations of breaking glass and the water sensors 31 monitor resistance levels that change when covered by water. All of the respective sensors report detected events to the control panel 12, through wired or wireless links 32. These and other event detecting devices are well known in the security industry and will not be described further here.

Although the event detectors 14 may be arranged in a single loop or zone, preferably they are arranged in multiple loops to support different levels and types of protection. In a home, for example, one zone might cover the periphery of the structure, using contact switches on doors and windows, while another zone might protect its interior,

-5-

using passive infrared and microwave motion detectors. The peripheral zone could then be armed even when the residents are home, and they could move around inside the structure without activating an alarm. All zones might be armed,

5 representing a higher level of security, when the building is unoccupied. Smoke and water detectors typically would be in one or more separate zones that are always on, and their state would not change with the arming and disarming of the other respective zones used for intrusion detection.

10           Output devices 16 include sounders 34, such as bells or sirens, and/or strobe lights 36. When control panel 12 receives reports of detected events from event detectors 14, the panel 12 analyzes the reports for validity and applies signal processing to reduce false alarms. When a  
15 valid signal is received, the panel initiates an alarm signal by activating one or more of the output devices through appropriate drivers and relays 38.

          Communications channel 18 is a publicly switched telephone network (PSTN) 40. The control panel uses the  
20 telephone network to report alarms to remote monitoring services, which may then notify the police, contact the owner of the protected structure, and/or take other appropriate action according to instructions programmed in advance.

25           Input and output device 20, sometimes called a keypad or code pad, includes actuators and displays for controlling the security system and presenting information about its status.

          An alpha-numeric keypad section 42, similar to the  
30 dialing keys on a telephone, facilitates the entry of personal identification codes that limit system access to authorized users. A proper code is entered first, to

-6-

identify an authorized individual, and then the various states of operation of the system can be changed from the keypad. Of course other methods also might be used, such as wireless transmitting devices and automatic schedulers or  
5 clocks. The schedulers or clocks change system settings according to a predetermined schedule. The alpha-numeric keypad 42 also serves to input data to system memory, during installation, and later when changes are desired in system functions.

10           A set of actuator keys 44 are provided for changing the operational states of the system. Key 46 turns the system on, meaning that it arms all zones for detecting intruders. Key 48 turns the system off, again meaning that it disarms all zones for detecting intruders. Key 50,  
15 sometimes called the home key, turns on, or arms, only those zones that protect the periphery of the structure, permitting authorized activity inside the structure. Various levels of security can thus be set by changing the operational state of the system to fully armed, partially  
20 armed or not armed. Again, however, even when the system is only partially armed, or not armed, these terms are used in connection with intrusion detection. Smoke alarms, water entry alarms, and the like, will operate in all system states to initiate an alarm.

25           System status is indicated by light emitting diodes (LEDs) 52 and a liquid crystal display 54 (LCD). The light emitting diodes 52 indicate that the power is on and whether the system is armed, partially armed or disarmed. The liquid crystal display provides information and  
30 instructions pertinent to the operation of the system.

          The control panel 12 contains a system controller 55, including a microprocessor 56 and appropriate memory 57,



-7-

a communications interface 58, such as an auto-dialer, and the drivers and relays 38. The controller 56 receives signals from the various event detectors 14, processes the signals to reduce false alarms, sends alarm signals to a relay that operates the output devices 16, and initiates communications over the publicly switched telephone network 40. The controller 56 operates according to instructions, data and commands provided during its manufacture, entered through alpha-numeric keypad section 42 during and after its installation, and through actuator keys 44.

Referring now more specifically to the present invention, and to Figures 2 and 3, the security system is provided with the additional capability to communicate with a telephone service provider, and change a telephone function offered by that service provider, in response to changes in the operational state of the security system. Using the keypad section 42 (Figure 1), a code is entered representing a command recognized by the service provider and directing the change in the telephone function, box 62. The same step may be repeated to enter a second code. The first code might be used to activate the feature and the second to deactivate the feature. Such codes are recognized by automated equipment at the service provider that recognizes the command and makes the changes requested by the code.

Assuming the telephone feature is call forwarding, a pound sign is entered (#), followed by 27, followed by an asterisk (\*), the phone number to which calls are to be diverted and another pound sign (#), boxes 62 and 66. The pound signs indicate the beginning and end of the message. 27 is the code for the call forwarding feature and the asterisk separates the code command from the diversion

-8-

number. The security system then has the data it needs to implement and cancel call forwarding. Call forwarding is implemented by the command code and diversion telephone number, which are expressed as dual tone multi-frequency (DTMF) signals, or other appropriate signals, after the dial tone. It is cancelled by sending the same command code with no diversion number.

Figure 3 shows the operation of the security system to change a telephone function. In this preferred embodiment the changed function is call forwarding, which is activated or deactivated in response to changes in the operating state of the system. Such changes occur when the system switches between higher and lower levels of security, such as fully armed, partially armed and disarmed. When such a change in state occurs, box 68, the controller looks to see if the system was armed, or its security level was increased, box 70. If so, it waits for a dial tone and sends the command, including the appropriate phone number, to active call forwarding, boxes 72, and 76. It then hangs up, box 78. If, on the other hand, the change in state was to disarm, or a decrease in the security level, box 80, then the controller sends the command to deactivate call forwarding, boxes 82, and 86. It then hangs up, box 74.

One of the actuator keys 88 (Figure 1) may be used to turn this feature of the security system on or off, and one of the light emitting diodes 90 may indicate its status. When it is on, the call forwarding commands are sent automatically when an appropriate change occurs in the state of operation of the system. When it is off, the call forwarding commands are not sent.

It should now be apparent that an improved security system has been provided that enhances the use of

-9-

telephone functions, such as call forwarding. The features are enabled and disabled automatically in response to normal use of the security system, and a status light on the keypad may be used to remind the user that the system is programmed

5 to make the changes. Valuable telephone features should be used more often, since a lapse of memory will less likely result in the forwarding of a telephone call to an unoccupied location.

While the invention is described in connection

10 with a preferred embodiment, other modifications and applications will occur to those skilled in the art. The claims should be interpreted to fairly cover all such modifications and applications within the true spirit and scope of the invention.

15

-10-

PARTS LIST

<u>Reference No.</u>	<u>Part</u>
10.	Event detecting system
5 12.	Control panel
14.	Event detectors
16.	Output devices
18.	Communications channel
20.	Input & output device
10 22.	PIR sensors
24.	Microwave sensors
26.	Contact switches
28.	Smoke sensors
30.	Glass break sensors
15 31.	Water sensor
32.	Wired or wireless links
34.	Sounders
36.	Strobe lights
20 38.	Drivers & relays
40.	PSTN
42.	Keypad section
44.	Actuator keys
46.	On key (arming)
25 48.	Off key (disarming)
50.	Home key (partially arm)
52.	LEDs
54.	LCD
30 55.	System controller
56.	Microprocessor
57.	Memory
58.	Communications interface
35 62-86	(even numbers) are flow diagram steps.
88.	Actuator key
90.	LED

**CLAIMS:**

1                   1.    An event detecting system having multiple  
2   states of operation, said system including a device for  
3   switching said system between said multiple states and a  
4   communications interface for communicating over a  
5   communications network; characterized in that:

6                    said system includes a controller that responds to  
7   said switching to initiate communications over said  
8   communications network with a provider of services for said  
9   communications network, said communication including a  
10   command to change communications functions provided by said  
11   service provider.

1                   2.    The invention of claim 1, wherein:

2                    said event detecting system is a security system  
3   having a plurality of event detectors reporting the  
4   occurrence of detected security related events;

5                    said communications network is a publicly switched  
6   telephone network;

7                    said service provider is a provider of telephone  
8   functions; and,

9                    said communications functions is call forwarding.

1                   3.    The invention of claim 2, wherein:

2                    said multiple states of operation of said security  
3   system include a first state of operation and a second state  
4   of operation, said first state of operation providing a  
5   higher level of security than said second state of  
6   operation; and,

7                    said command: a) enables said call forwarding  
8   feature when said system switches into said first state;  
9   and, b) disables said call forwarding feature when said  
10   system switches out of said first state.

1           4.    The invention of claim 2, wherein:  
2                said security system is located in a structure  
3   having an interior region surrounded by a perimeter;  
4                said security system includes a protection zone  
5   covering said interior region;  
6                said multiple states of operation of said security  
7   system include a first state of operation where said  
8   interior zone is armed, and a second state of operation  
9   where said interior zone is not armed; and,  
10              said command: a) enables said call forwarding  
11   feature when said system switches into said first state;  
12   and, b) disables said call forwarding feature when said  
13   system switches into said second state.

1           5.    The invention of claim 1, wherein said event  
2   detection system includes:  
3                a system controller;  
4                a plurality of event detectors reporting the  
5   occurrence of predetermined security related events to said  
6   controller;  
7                a keypad disposed for communicating with said  
8   controller and including at least one actuator for changing  
9   the state of arming of said system;  
10              said communications network is a publicly switched  
11   telephone network operated by a telephone service provider;  
12   and,  
13              wherein said controller includes a setting in  
14   which said controller responds to changes in said arming  
15   state by initiating a communication to said telephone  
16   service provider including a command changing a telephone  
17   function provided by said service provider.

1           6.    The invention of claim 5, wherein said event  
2 detectors include detectors of one or more events selected  
3 from the class of: an intruder detector, a fire detector, a  
4 water detector.

1           7.    The invention of claim 6, wherein;  
2           said system: a) has an armed state in which said  
3 system initiates a predetermined alarm signal in response to  
4 said occurrence reporting; and, b) a disarmed state in which  
5 said system does not initiate said predetermined alarm  
6 signal in response to said occurrence reporting; and,  
7           said command enables a telephone function in  
8 response to said armed state and disables said telephone  
9 function in response to said disarmed state.

1           8.    The invention of claim 5, wherein said  
2 telephone function is call forwarding and said controller  
3 sends a command initiating said call forwarding function in  
4 response to an increased level of arming of said system and  
5 sends a command canceling said call forwarding function in  
6 response to a decreased level of arming of said system.

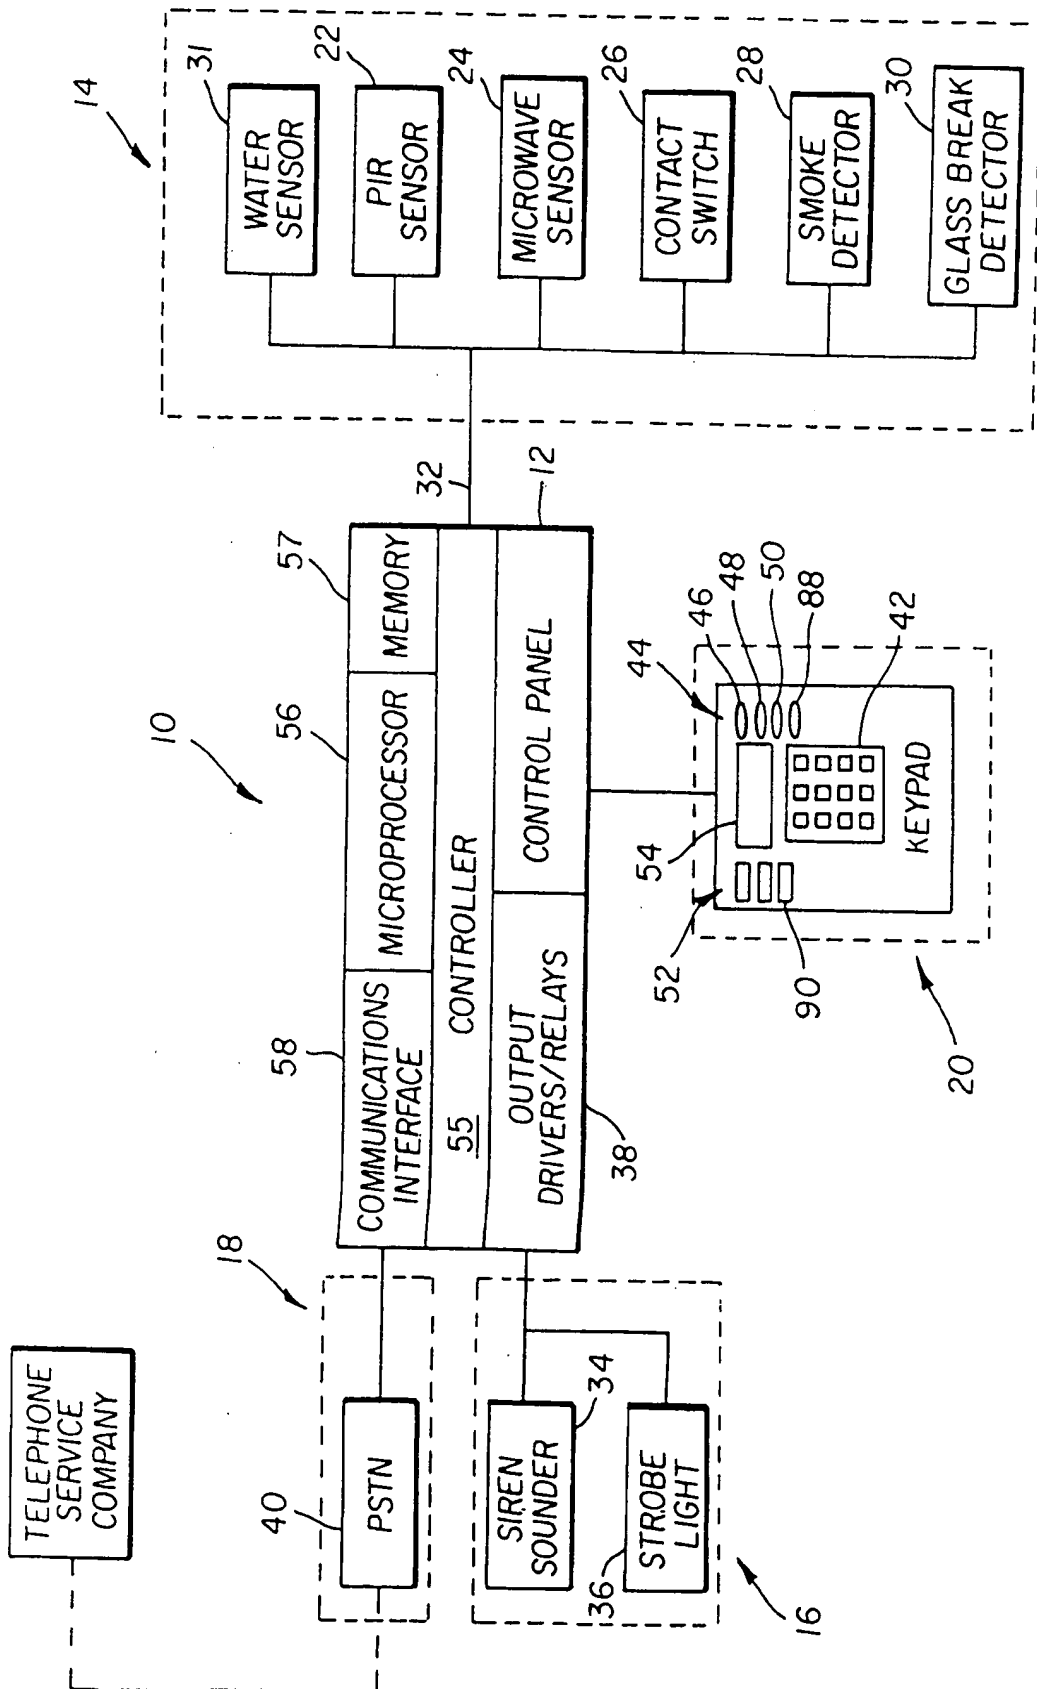


FIG. 1




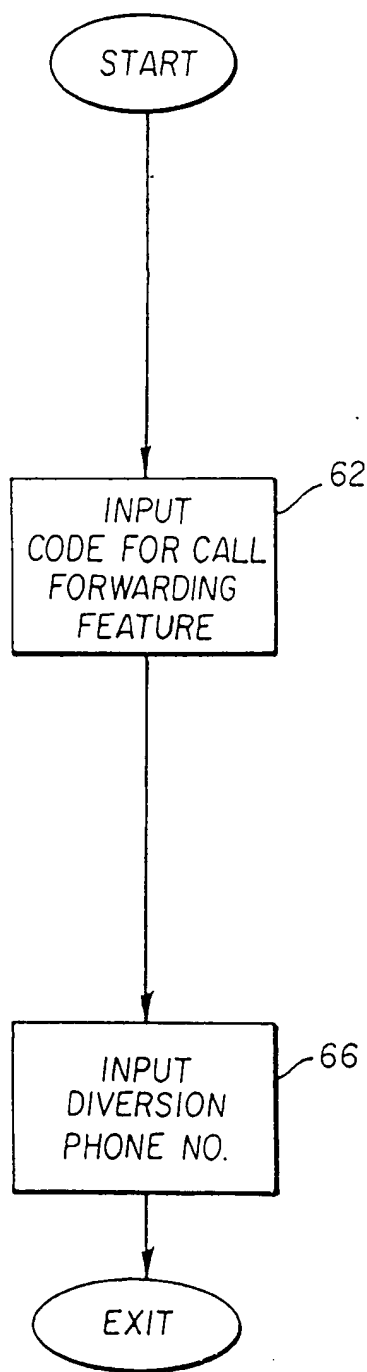


FIG. 2

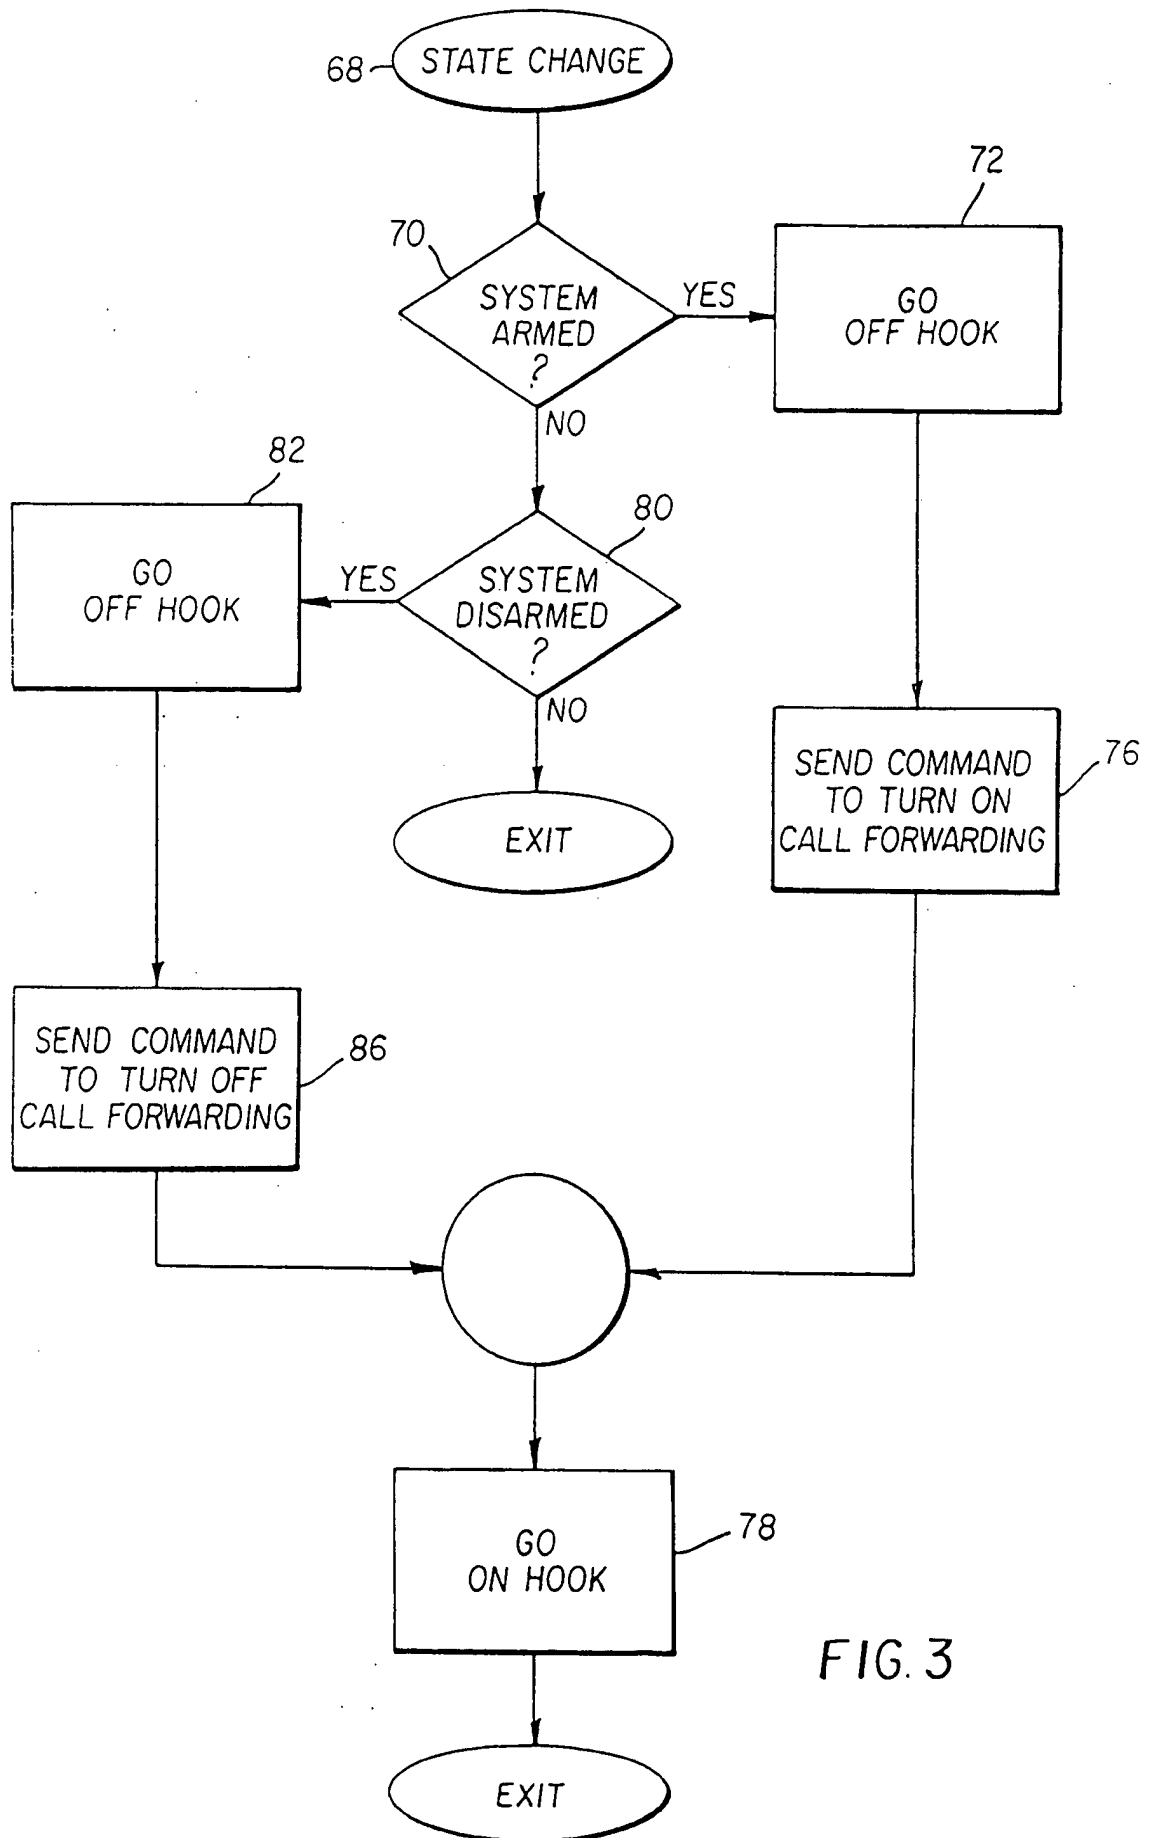

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US99/08662

## A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) :H04M 11/04

US CL :379/42

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 379/37-51, 211, 212.

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X,E	US 5,901,211 A (DEAN et al) 04 May 1999, see entire patent.	1-8

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents.	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
*A* document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
*B* earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
*C* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*Z* document member of the same patent family
*D* document referring to an oral disclosure, use, exhibition or other means	
*F* document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

11 JUNE 1999

Date of mailing of the international search report

20 JUL 1999

Name and mailing address of the ISA/US  
Commissioner of Patents and Trademarks  
Box PC1  
Washington, DC 20231

Facsimile No (703) 305-3230

Authorized officer

WING F. CHAN

Telephone No. (703) 305-4732

*James R. Matthews*